

# Helixon





①







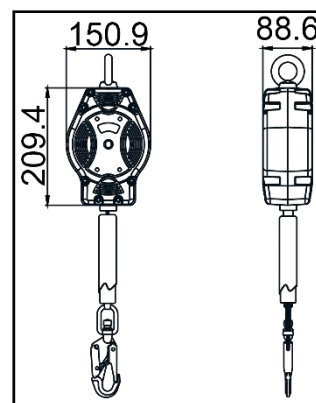


②



③



HS CODE
84251910
CARTON SIZE / PCS.
60 x 40 x 24 cm / 4
AET N°2777/10832-02/E09-01
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
MODULE D FI14/14003.02
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland


REF.	FA 20 504 06B
LG. 	6 m
KG	140 KG
CE	EN 360:2002
MAT. 	Polyamide 6 - 30% fiber glass
	PES 25 mm
	FA 50 101 17 / FA 50 203 20 with fall indicator
	X2
R(kN)	15 kN
	NO
+	En 360 §4.6 (endurance test)
	2.33 KG

LG.  
KG

Longueur Poids maxi utilisateur  
Length Max. user weight  
Longitud Peso máximo del usuario  
Lunghezza Peso Max. dell'utente  
Länge Höchstgewicht des Benutzers

MAT.


Matière carter / sangle  
Material of casing / webbing  
Material cárter / correa  
Material dei carter / Cinghia  
Material Gehäuse / Gurt



Matière connecteur haut / connecteur bas  
Material of top connector / bottom connector  
Material conector alto / conector bajo  
Materiale connettore alto / connettore basso  
Material oberes / unteres Verbindungselement



Nombre d'émerillons  
Number of swivels  
Cantidad de eslabones giratorios  
Numero di tornichetti  
Anzahl der Wirbel



Homologué pour le travail à proximité d'arêtes vives  
Approved for work near sharp edges  
Homologado para trabajo cerca de aristas vivas  
Omologato per lavoro in prossimità di spigoli vivi  
Zugelassen für Arbeiten in der Nähe scharfer Kanten