




**ARDON®**  
**WORKWEAR**  
**& OUTDOOR**

## ARDON® LEADER S3

SAFETY SHOES

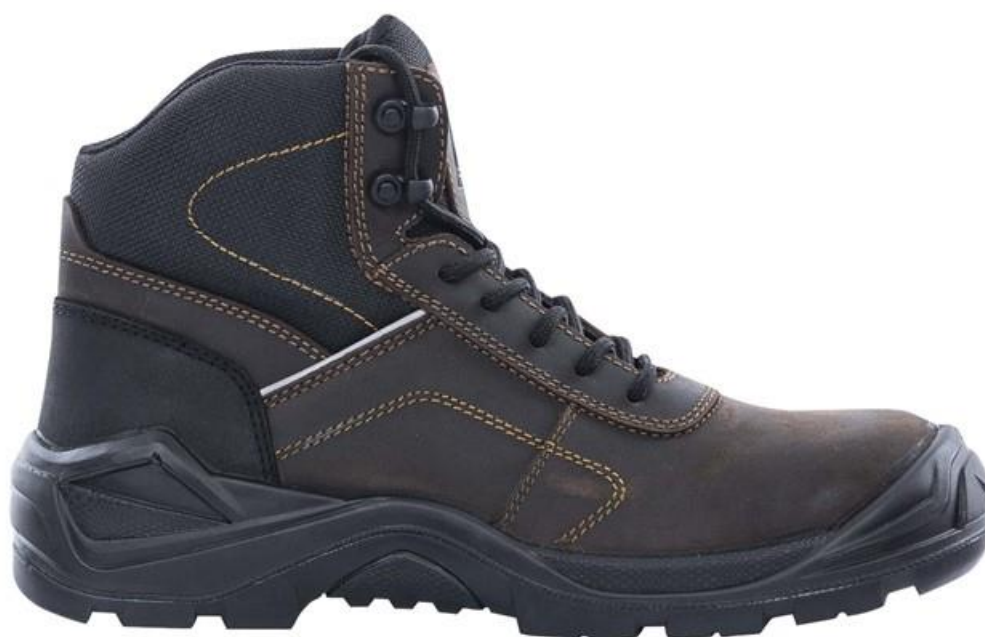

**DEFUSE  
CONTROL**



**DRY AIR**



**WATER  
REPELLENT**



**REFLECTIVE**



**NONMETALLIC**



**ARDON®**  
**WORKWEAR**  
& **OUTDOOR**

# ARDON® LEADER S3

SAFETY SHOES

## ARTICLE

G3392

## MATERIAL

Upper

NUBUCK cowhide leather, thickness 1.8 - 2 mm, hydrophobic /fabric

Lining

MESH-type laminated breathable fabric

Sole

PU/PU, direct injection

Toe cap

Fibreglass 459

Plate

Kevlar

Insole

ANATOMIC FOAM – anatomically shaped from EVA foam

## SIZE

38-48

## UNIT

pair

## PACKAGE

Units in a carton

10 pairs

Units in a box

1 pair

## DIMENSIONS

Carton H x W x D (cm)

38-42  
34 x 48 x 65

43-48  
37 x 50 x 69

Carton (cbm)

0,106

0,128

Size EUR

35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

Insole length mm

-	-	-	252	259	266	272	278	286	291	298	306	312	319	-	-	-
---	---	---	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---	---	---

Foot length cm

-	-	-	24,2	24,9	25,6	26,2	26,8	27,6	28,1	28,8	29,6	30,2	30,9	-	-	-
---	---	---	------	------	------	------	------	------	------	------	------	------	------	---	---	---

## DESCRIPTION

Safety shoes with an upper made of high-quality NUBUCK leather, hydrophobic and fabric, with a fiberglass toe cap and Kevlar insole, reflective strip for higher visibility, dual-density polyurethane sole.



**ARDON®**  
**WORKWEAR**  
& OUTDOOR

## NORMS















(EU) 2016/425

EN ISO 20345:2011

Personal protective equipment - Safety footwear

Category:

S3 CI SRC

Categories	EN ISO 20345	
E - energy absorption in the heel area	✓	
FO - resistance to oils and fuels	✓	
A - antistatic footwear	✓	
SRC - resistance to slipping on ceramic floor tiles with SLS and on steel floors with glycerin	✓	
WR - upper resistant to water	✓	
Safety toe cap for toe protection	✓	
P - resistance to punctures (protective insole)	✓	
SRA - slip resistance ceramic floor tiles with SLS		
HRO - resistance to contact heat up to 300 °C		
insulation of the bottom of the shoe against heat		
insulation of the bottom of the shoe against the cold	✓	
Splatters of molten metal		
ESD – shoe protects against electrostatic discharge and can be used on EPA premises		
The shoes do not contain metal parts	✓	
-		
-		
-		



**ARDON®**  
**WORKWEAR**  
& **OUTDOOR**

<b>CODE</b>	<b>EAN</b>	<b>CARTON WEIGHT (KG)</b>	<b>UNIT WEIGHT (KG)</b>
G3392/38	8592390168368	15,0	1,500
G3392/39	8592390168375	15,5	1,550
G3392/40	8592390168382	17,0	1,700
G3392/41	8592390168399	17,3	1,730
G3392/42	8592390168405	18,0	1,800
G3392/43	8592390168412	18,5	1,850
G3392/44	8592390168429	18,8	1,880
G3392/45	8592390168436	19,0	1,900
G3392/46	8592390168443	20,5	2,050
G3392/47	8592390168450	21,0	2,100
G3392/48	8592390168467	22,0	2,200





**ARDON®**  
**WORKWEAR**  
**& OUTDOOR**





**ARDON®**  
**WORKWEAR**  
& OUTDOOR

